

EUROMAX

IMPROVED RELIABILITY IN PERFORMANCE



THE SIGN OF COOL QUALITY

EUROMAX



Euromax-195

THE FIRST TRULY INTELLIGENT CABINET

Effortless Euromax, easy to use - intelligent enough to protect both itself and your sales. A total refrigeration solution that keeps even the most delicate of products fresh and tempting.

INVINCIBLE QUALITY IN ITS SERIES

- Excellent product temperatures
- Wide opening, huge capacity, outstanding display
- Energy saving hot gas evaporation
- Easy front service access minimizes down time and service costs



Euromax-125 Fjordland

PERFECT FOR PRODUCTS THAT NEED AN ACCURATE TEMPERATURE

- Dairy
- Ready meals
- Take away
- Beverages
- Packed Meat
- Salads
- Deli Products



PLUG-IN MODELS

- Integral compressor complete with control devices (refrigerant R404A)
- Hot gas evaporation tray
- Additional electrical evaporation tray


REMOTE MODELS

- Expansion valve for R404A refrigerant
- Wiring box
- Defrost water outlet pipe

STANDARD EQUIPMENT

- Evaporator with fan
- Upright lighting
- Top lighting
- Front riser for base shelf
- NRC-100 control device
- Front bumper trim

EUROMAX

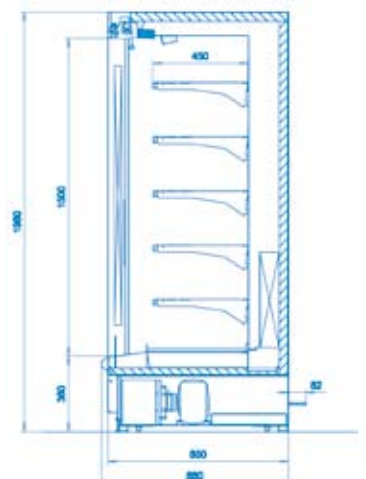

OPTIONAL ACCESSORIES

- Expansion valve for alternative refrigerants in remote models
- Defrost water outlet pipe instead of electrical water disposal in plug-in models
- Water pump for removing defrost water
- Thermoglass end panel 25 mm
- Mirrored end panel 25 mm
- Acrylic divider panel
- Night blind
- 450 mm shelves with consoles
- Price trims for shelves
- 80 mm front grid on shelves
- Acrylic front riser on shelves
- Divider on shelf
- Base shelf divider
- Display rod for hanging products by hooks
- Straight mirror
- 3 stepped mirror
- Raised base shelf for fruit and veg, straight
- Raised base shelf for fruit and veg, 3 stepped
- Front risers for base shelf, 80 mm and 120 mm
- Under shelf lighting
- Control devices
- Multiplexing kit

TECHNICAL INFORMATION

MODEL	EUROMAX-125-M	EUROMAX-195-M	EUROMAX-245-M	EUROMAX-125-O	EUROMAX-195-O	EUROMAX-245-O
Length+end panels mm	1250	1925	2450	1250	1925	2450
Body length mm	1200	1875	2400	1200	1875	2400
Height mm	1980	1980	1980	1980	1980	1980
Depth mm	880	880	880	880	880	880
Power input [W]	2020	2935	3200	900	1640	1840
Display area m ²	3,15	5,08	6,3	3,15	5,08	6,3

Front panel height 360 mm.

Air Temperature in all models +0...+2.

The technical specifications relate to the following ambient conditions. Ambient temperature +25°C, relative humidity 60%. Electrical supply 230V, 1 phase, 50 cycles.



Norpe Ltd. Tel. +358 19 537 8000
www.norpe.fi • www.norpe.com • marketing@norpe.fi

FINLAND Norpe Suomi Oy Tel. +358 19 537 8000
www.norpe.fi • www.norpe.com • marketing@norpe.fi

SWEDEN Norpe AB Tel. +46 8 594 112 00
www.norpe.se • info@norpe.se

NORWAY Norpe AS Tel. +47 33 36 35 00
www.norpe.no • post@norpe.no

POLAND Norpe Polska Sp. z o.o. Tel. +48 22 882 00 20
www.norpe.pl • norpe@norpe.pl

GREAT BRITAIN Norpe UK Limited Tel. +44 161 968 5080
www.norpe.co.uk • info@norpe.co.uk

RUSSIA Norpe Russia Tel. +7 812 273 3912
www.norpe.com.ru • sale@norpe.spb.ru

ESTONIA Norpe Eesti Oü Tel. +372 656 1717
www.norpe.ee • info@norpe.ee

LATVIA Norpe Latvia Filiale Tel. +371 736 9827
www.norpe.com • info@norpe.lv